

1 hydraulic function, Quick mounting, hook-on type, end-of-stroke slow-down SOFTSTOP, high visibility design, e.g. CofG up to 1.800 mm, Bottom brackets with roller guidance, SMOOTHROLL.


## Technical Data

| Model   | Cap.<br>kg | LCD<br>mm | A<br>mm | B1<br>mm | B2<br>mm | C<br>mm | D<br>mm | G<br>mm | S<br>mm | J<br>mm | ISO | V<br>mm | CofG<br>Z<br>mm | Weight<br>kg | Price<br>人民币 |
|---------|------------|-----------|---------|----------|----------|---------|---------|---------|---------|---------|-----|---------|-----------------|--------------|--------------|
| 2T151P2 | 2.500      | 600       | 76      | 680      | 680      | 44      | 32      | 116     | ±75     | 808     | 2   | 72      | 36              | 56           | On request   |
| 2T151P2 | 2.500      | 600       | 76      | 890      | 680      | 44      | 32      | 116     | ±100    | 858     | 2   | 72      | 36              | 66           | On request   |

Load Backrest see model T179.

Other construction widths available upon request.

Optional in explosion proof version

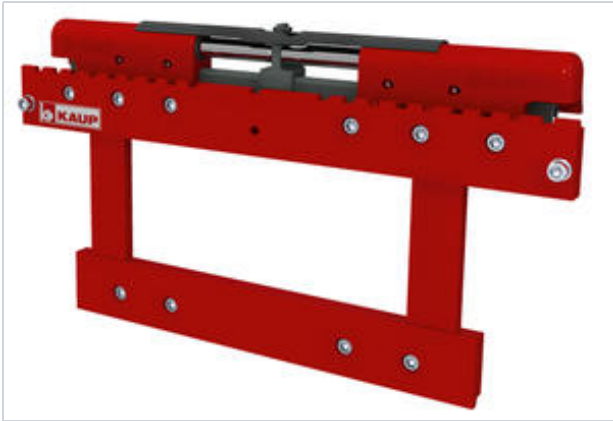

### Specification:

KAUP, as leading manufacturer of attachments, has a comprehensive range of attachments for Reach Trucks. The Sideshifter for Reach Trucks 2T151P2 is the right choice when palletised goods must be shifted laterally on a regular basis. The Sideshifter optimises in-plant material handling.

### Qualities:

- Design and fork carriage width specially adapted for operation with Reach Trucks
- Fork carriage tilt for Reach Trucks with fixed mast possible
- Sideshift stroke of  $\pm 100$  mm serially - less sideshift stroke possible