


with independent sideshift - for cylindrical steel drums - 2 hydraulic functions, This Drum Clamp can transport 1 or 2 drums palletless and safely.

Technical Data

Model	Number of drums	Cap. kg	LCD mm	S mm	A mm	B mm	C mm	F mm	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
1T415-1	1-2	700	320	±100	420-1.600	970	485	146	2	133	113	196	On request
1,5T415-1	1-2	1.250	320	±100	440-1.620	970	485	195	2	133	108	228	On request
1,5T415-1	1-2	1.250	320	±100	440-1.620	970	485	195	3	133	108	228	On request

The arms are coated with Remagrip (see coatings in the pricelist).
 Fitted with pressure reduction and manometer gauge.C1160
 Available with arms for plastic drums upon request.
 This version is for cylindric drums with diameter of 600 mm. For other diameters on request.
 Also available without sideshift, model T405-1
 Load Backrest see model T179.

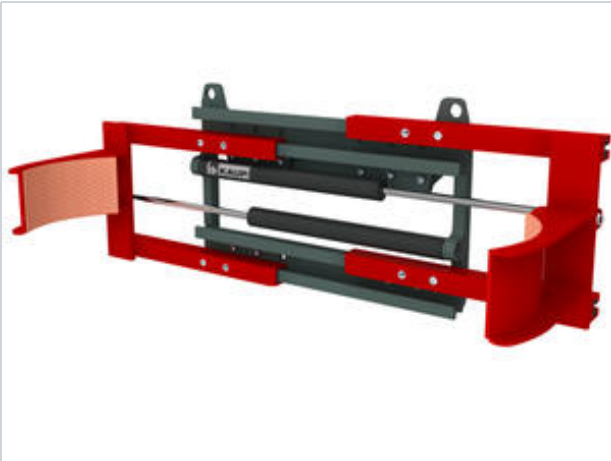

Specification:

The KAUP Drum Clamp T415-1 can transport a drum or two drums side by side certainly and without palettes. Therefor the clamp arms are serially vulcanised with rubber.

Qualities:

- Low lost load - good residual capacity
- Good visibility conditions
- Stable construction
- Independent sideshift serially