

Short arm fixed - 2 hydraulic functions, Especially designed for extreme narrow rolls (width from 150 mm)


## Technical Data

Model	Cap. kg	LCD mm	Rotation	A1-A2 mm	G mm	K mm	M mm	Md $\Delta$ -P = 125 bar Nm	Req. oil volume per rotation ltr.	ISO	V mm	CofG Z mm	Weight kg	Price 人民币
<b>1T458S</b>	350	600	90°	250- 1.200	180	200	84	1.950	--	2	340	258	245	On request
<b>1T458S</b>	350	600	360°	250- 1.200	180	200	109	2.570	3,0	2	320	222	260	On request

Capacity related to max. roll diameter.

For taking up horizontal rolls, 5-degree mast forward tilt is required.

For contact pad coatings see accessories in the pricelist.

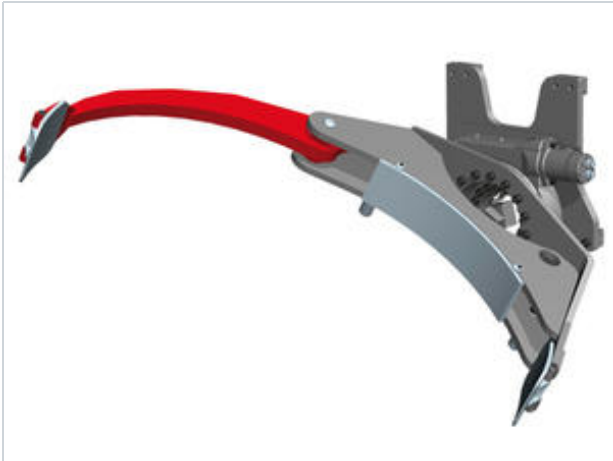

### Specification:

The view-optimised designed KAUP

Rotating Role Clamp T458S is well suited especially for the careful admission and the transport of narrow roles from a width of 150 mm.

### Qualities:

- Very good visibility conditions
- Favorable lost load and weight
- Respectable, slender arm construction
- Different contact pad coatings available
- Rotation 360° endlessly